


BRXA-P076G



- **轮架:**
 - 采用优质铬镍不锈钢(材料代码: 1.4301/AISI 304), 冲压。所有零部件包括轮轴材料均耐腐蚀。螺栓轮轴。表面磨光滑。
- **单轮:**
 - 轮胎/胎面: 采用优质耐冲击尼龙6。
 - 轮辋/轮体: -

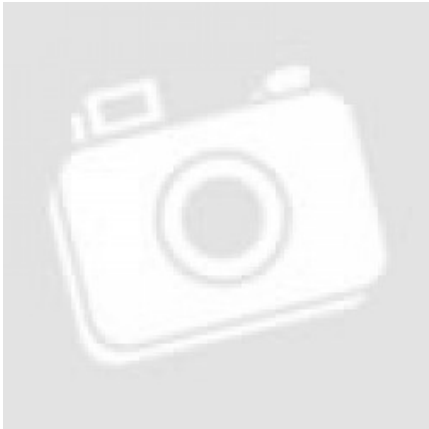

Technical data

单件重量	0.13kg
总高度 (H)	98mm
承载能力	75.00kg
轮宽 (T2)	23mm
轮径 (D)	75mm
最低耐温性	-25° C - +80° C ° C
最高耐温性	80° C
胎面及轮胎硬度	70 ShoreD
轴承种类	滑动轴承
顶板尺寸 (A, B)	43mm
螺栓孔径 (d)	11mm
制造商	Blickle

滚动阻力	■■■■■
行走噪音	■■■■■
保护地面	■■■■■

变量

☐		-EXR02
☐		-EXR03
☐		-EXR04
☐		-EXR05
☐		-EXR12
☐		-EXR13
☐		-EXR14
☐		-EXR15
☐		-EXV02
☐		-EXV03
☐		-EXV04
☐		-EXV05
☐		-EXV07
☐		-EXV12
☐		-EXV13
☐		-EXV14
☐		-EXV15
☐		-EXV17

